

Price List

Gurney & White Ltd

Lamp Catalogue Feb 2011



CATFORD TEL:
DARTFORD TEL:
Plumbing Supplies

0208 333 1001
01322 271171
01322 28 68 68

2 CFL's



Low Energy Lamp

10,000 hours rated life.
10,000 switching cycles
2700K Warm White, 600 Lumen
2 second strike up time, 60% light in 60 seconds.
130mm x 64mm
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
PM0487B	11W BC GLS Type	130 x 64	BC(B22d)	11w	0.57	0.41
PM0487E	11W ES GLS Type	130 x 64	ES(E27)	11w	0.57	0.41



MEGAMAN® TUBULAR

8000 hour rated CFL's
modo range **NON** Dimmable
BC (B22), ES (E27) and SES (E14) cap formats.
Plastic base made from recycled materials.
Lightweight and compact design.
Slim diameter base is easy to install in smaller fittings.
Four wattages available 8W, 11W, 14W and 20W options.

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
W150814	W1508	108 x44	SES	8w	1.44	1.40
W150822	W1508	103 x44	BC	8w	1.44	1.40
W150827	W1508	105 x44	ES	8w	1.44	1.40
W151114	W1511	118 x44	SES	11w	1.44	1.40
W151122	W1511	113 x44	BC	11w	1.44	1.40
W151127	W1511	115 x44	ES	11w	1.44	1.40
W151422	W1514	125 x44	BC	14w	1.59	1.55
W151427	W1514	127 x44	ES	14w	1.59	1.55
W3U12022	W3U120	130 x49	BC	20w	1.85	1.80
W3U12027	W3U120	132 x49	ES	20w	1.85	1.80

Equivalent rating 8w = 40w. 11w = 60w. 14w = 70w. 20w = 100w.



MEGAMAN® CLASSIC

Ping Pong (15,000 hours rated life).
600,000 switching cycles
Translucent housing for all-round illumination
Warm White colour temp.
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
191123	GA807i Ping-Pong	74 x45	ES(E27)	7w	5.50	5.35
101402	GA807i Ping-Pong	73 x45	BC(B22)	7w	5.50	5.35
181124	GA807i Ping-Pong	83 x45	SES(E14)	7w	5.50	5.35
101781	GA807i Ping-Pong	74 x45	SBC(B15)	7w	5.50	5.35

RoHS and WEEE Compliant plus lead free glass tube & low mercury level.
Incandescent Equivalents 7w = 35w 11w = 60w 9w = 45w 20w =100w



MEGAMAN® CLASSIC

Golf Ball (15,000 hours rated life.)
600,000 switching cycles
Translucent housing for all-round illumination
Warm White colour temp.
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
940035	GA707i Golf Ball	90 x45	SES(E14)	7w	4.63	4.50
192120	GA707i Golf Ball	86 x45	BC(B22)	7w	4.63	4.50

RoHS and WEEE Compliant plus lead free glass tube & low mercury level.
Incandescent Equivalents 7w = 35w 11w = 60w 9w = 45w 20w =100w



MEGAMAN® CLASSIC

Candle (15,000 hours rated life.)
600,000 switching cycles
Translucent housing for all-round illumination
Warm White colour temp.
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
108022	CL707iCS Candle	96 x37	ES(E27)	7w	4.32	4.20
940233	CL707iCS Candle	96 x37	SES(E14)	7w	4.32	4.20
138029	CL707iCS Candle	96 x37	BC(B22)	7w	4.32	4.20
941650	CL707iCS Candle	96 x37	SBC(B15)	7w	4.32	4.20
119028	CL709iCS Candle	109 x37	SES(E14)	9w	5.04	4.90
139026	CL709iCS Candle	107 x37	BC(B22)	9w	5.04	4.90
103161	CL709iCS Candle	108 x37	SBC(B15)	9w	5.04	4.90

RoHS and WEEE Compliant plus lead free glass tube & low mercury level.
Incandescent Equivalents 7w = 35w 11w = 60w 9w = 45w 20w =100w



MEGAMAN® CLASSIC

GLS Type (12,000 hours rated life.)
600,000 switching cycles
Translucent housing for all-round illumination
Warm White colour temp.
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
940059	GA709i Mini GLS	99 x45	SES(E14)	9W	5.04	4.90
940066	GA709i Mini GLS	95 x45	ES(E27)	9W	5.04	4.90
903048	GA911i Mini GLS	102 x55	ES(E27)	11w	5.91	5.75
903123	GA911i Mini GLS	100 x55	BC(B22)	11w	5.91	5.75
940431	GSU111i GLS Classic	113 x60	ES(E27)	11w	4.63	4.50
940486	GSU111i GLS Classic	113 x60	BC(B22)	11w	4.63	4.50
210176	GSU520 GLS Classic	158 x65	ES(E27)	20w	4.63	4.50
017225	GSU520 GLS Classic	159 x65	BC(B22)	20w	4.63	4.50

RoHS and WEEE Compliant plus lead free glass tube & low mercury level.
Incandescent Equivalents 7w = 35w 11w = 60w 9w = 45w 20w =100w



MEGAMAN® CLASSIC

Globe (10,000 hours rated life.)
600,000 switching cycles
Translucent housing for all-round illumination
Warm White colour temp.
Energy Rating 'A' **Non Dimmable**

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
933205	GSU420 Globe	149 x98	ES(E27)	20w	4.94	4.80
941377	GSU420 Globe	149 x98	BC(B22)	20w	4.94	4.80

RoHS and WEEE Compliant plus lead free glass tube & low mercury level.
Incandescent Equivalents 7w = 35w 11w = 60w 9w = 45w 20w =100w



MEGAMAN® DIMMERABLE®

Smooth **Fully Dimmable** CFL's for standard dimmer switches
10,000 hours rated life.
The worlds first linear dimming CFL that is opeable on conventional dimmer switches.

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
128129	GSU111d GLS	114 x60	ES(E27)	11w	7.20	7.00
129713	GSU111d GLS	112 x60	BC(B22)	11w	7.20	7.00

10% to 100% Smooth Dimming with conventional dimmer switches.



MEGAMAN® DIMMERABLE®

Smooth **Fully Dimmable** CFL's for standard dimmer switches
10,000 hours rated life.
The worlds first linear dimming CFL that is opeable on conventional dimmer switches.

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
418964	CL807d Candle	105 x37	SES(E14)	7w	7.20	7.00
418123	CL807d Candle	105 x37	ES(E27)	7w	7.20	7.00
417897	CL807d Candle	108 x37	SBC(B15)	7w	7.20	7.00
417284	CL807d Candle	103 x37	BC(B22)	7w	7.20	7.00
427867	CL809d Candle	123 x43	SES(E14)	9w	7.20	7.00
421767	CL809d Candle	118 x43	ES(E27)	9w	7.20	7.00
421766	CL809d Candle	116 x43	BC(B22)	9w	7.20	7.00
421821	CL809d Candle	122 x43	SBC(B15)	9w	7.20	7.00

10% to 100% Smooth Dimming with conventional dimmer switches.



MEGAMAN® DIMMERABLE®

Smooth **Fully Dimmable** CFL's for standard dimmer switches
10,000 hours rated life.
The worlds first linear dimming CFL that is opeable on conventional dimmer switches.

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
127111	SLU111d Tubular	106 x37	ES(E27)	11w	6.84	6.65
121617	SLU111d Tubular	104 x37	BC(B22)	11w	6.84	6.65
126775	WL218d Tubular	130 x46	ES(E27)	18w	9.26	9.00
123762	WL218d Tubular	128 x46	BC(B22)	18w	9.26	9.00

10% to 100% Smooth Dimming with conventional dimmer switches.

Dartford. Phone: 01322 27 11 71 Fax: 01322 272266

Catford. Phone: 0208 333 1001 Fax: 020 8695 6773

All Prices + VAT E&OE
©Gurney & White Ltd.

On-line Shop www.gwsupplies.co.uk



MEGAMAN[®] REFLECTORS
Energy Saving Lamps
R50

15,000 hours rated life.
600,000 switching cycles

Warm White colour temp.
Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
165322	BR0907i R50	87 x 50	SES(E14)	7w	6.17	6.00
156297	BR0911i R50	87 x 50	ES(E27)	11w	6.99	6.80
168323	BR1111i R63	103 x 63	ES(E27)	11w	8.13	7.90



Low Energy GU10 Compact Fluorescent

Non Dimmable

CODE	DESCRIPTION	EACH
AU-GUF/27	7w CFL Short Neck Colour 27 (ww)	6.32
AU-GUF/64	7w CFL Short Neck Colour 64 (cw)	6.32
AU-GUF11/27	11w CFL Long Neck Colour 27 (ww)	6.60
AU-GUF11/64	11w CFL Long Neck Colour 64 (cw)	6.60

Short Neck 58mm Len. Long Neck 76mm Len



MEGAMAN[®] REFLECTORS
Energy Saving Lamps
R80

15,000 hours rated life.
600,000 switching cycles

Warm White colour temp.
Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
169320	BR1215i R80	113 x 80	ES(E27)	15w	8.90	8.65



2D LAMPS

CODE	TYPE	COL/REF	WATTS	EACH	25+	100+
2D16	2PIN	3500	16W	5.52	3.68	3.31
2D16	4PIN	3500	16W	5.52	3.68	3.31
2D28	2PIN	3500	28W	8.55	5.70	5.13
2D28	4PIN	3500	28W	8.55	5.70	5.13
2D38	4PIN	3500	38W	9.54	6.36	5.72



MEGAMAN[®] REFLECTORS
Energy Saving Lamps
PAR30H

15,000 hours rated life.
600,000 switching cycles

Warm White colour temp.
Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
163120	BR1315i PAR30H	88 x 95	ES(E27)	15w	10.80	10.50



MEGAMAN[®] PAR38 DIMMERABLE[®]
Energy Saving Lamps

Smooth Fully Dimmable CFL's for standard dimmer switches
10,000 hours rated life.

The worlds first linear dimming CFL that is opeable on conventional dimmer switches.

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
418122	BR0618d PAR38	133 x121	ES(E27)	18w	12.34	12.00



COMPACT PL SINGLE S TYPE

Average Life 10,000 Hours
COLOUR 3500

CODE	LENGTH MM	CAP	WATTS	EACH	10+	50+
F5BX/835 2Pin	107.8	G23	5W	3.28	2.62	2.05
F7BX/835 2Pin	136.8	G23	7W	3.28	2.62	2.05
F9BX/835 2Pin	167.3	G23	9W	3.28	2.62	2.05
F11BX/835 2Pin	237.3	G23	11W	3.28	2.62	2.05
F7BX/835/4P 4Pin	122.3	2G7	7	3.64	2.91	2.28
F9BX/835/4P 4Pin	152.8	2G7	9	3.64	2.91	2.28
F11BX/835/4P 4Pin	222.8	2G7	11	3.64	2.91	2.28



MEGAMAN[®] G9 CAPSULE
Energy Saving Lamps
7W G9

15,000 hours rated life.
Warm White colour temp.

Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
104221	4U107i G9	65 x37	G9	7w	4.63	4.50



COMPACT PL DOUBLE D TYPE

Average Life 10,000 Hours
COLOUR 3500

Non Dimmable

CODE	LENGTH MM	CAP	WATTS	EACH	10+	50+
F10DBX/835 2Pin	108.5	G24d-1	10	5.96	4.77	3.73
F13DBX/835 2Pin	133.0	G24d-1	13	5.96	4.77	3.73
F18DBX/835 2Pin	154.0	G24d-2	18	5.96	4.77	3.73
F26DBX/835 2Pin	169.5	G24d-3	26	5.96	4.77	3.73
F10DBX/835/4P 4Pin	101.0	G24q-1	10	5.96	4.77	3.73
F13DBX/835/4P 4Pin	125.5	G24q-1	13	5.96	4.77	3.73
F18DBX/835/4P 4Pin	146.5	G24q-2	18	5.96	4.77	3.73
F26DBX/835/4P 4Pin	162.0	G24q-3	26	5.96	4.77	3.73



MEGAMAN[®] R7s 118mm T/H Replacement Lamp
Energy Saving Lamps

25W R7s
15,000 hours rated life.

Warm White colour temp.
Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
109227	4P425i Warm White	118 x54	R7s	25w	8.23	8.00
109241	4P425i Cool White	118 x54	R7s	25w	8.23	8.00




MEGAMAN[®] PALMLITE LAMP
Energy Saving Lamps
GX53

15,000 hours rated life.
Warm White colour temp.

Non Dimmable

CODE	Type	Len x Dia mm	CAP	WATTS	EACH	10+
711267	GX109i Warm White	24 x75	GX53	9w	7.41	7.20
710249	GX0113i Cool White	37 x75	GX53	13w	8.64	8.40



COMPACT PL LONG L TYPE

Average Life 10,000 Hours
COLOUR 3500

Non Dimmable


CODE	LENGTH MM	CAP	WATTS	EACH	10+	50+
F18BX/835 4Pin	228.0	2G11	18	6.20	4.96	3.88
F24BX/835 4Pin	323.4	2G11	24	7.80	6.24	4.88
F36BX/835 4Pin	418.4	2G11	36	7.80	6.24	4.88
F40BX/835 4Pin	570.8	2G11	40	8.72	6.98	5.45
F55BX/835 4Pin	570.5	2G11	55	9.08	7.26	5.68

4 Fluorescent Tubes & LED Lamps



**T12 STANDARD 38mm^Ø
(HALOPHOSPHATE)
WHITE**

CODE	LENGTH	WATTS	EACH	25+	100+
T220	600MM	20W	10.40	7.28	6.24
T440	1200MM	40W	12.10	8.47	7.26
T565	1500MM	65W	14.45	10.12	8.67
T675	1800MM	75W	20.15	14.11	12.09
T810	2400MM	100W	13.70	9.59	8.22
T812	2400MM	125W	13.70	9.59	8.22

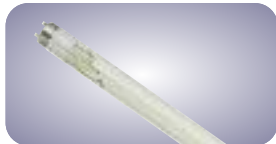


**T8 STANDARD 26mm^Ø
(HALOPHOSPHATE)**

CODE	LENGTH	WATTS	COLOUR	EACH	25+	100+
T218	600MM	18W	WHITE	3.00	2.10	1.32
T330	900MM	30W	WHITE	5.58	3.26	2.79
T436	1200MM	36W	WHITE	3.66	2.14	1.53
T558	1500MM	58W	WHITE	4.20	2.45	1.40
T670	1800MM	70W	WHITE	9.00	5.25	2.70
T218CW	600MM	18W	C/WHI	3.60	2.40	1.50
T436CW	1200MM	36W	C/WHI	3.66	2.44	1.53
T558CW	1500MM	58W	C/WHI	4.20	2.80	1.75
T670CW	1800MM	70W	C/WHI	9.00	6.00	3.75
T218WW	600MM	18W	W/WHI	3.60	2.40	1.50
T330WW	900MM	30W	W/WHI	5.58	3.72	2.33
T436WW	1200MM	36W	W/WHI	3.90	2.60	1.63
T558WW	1500MM	58W	W/WHI	4.44	2.96	1.82
T670WW	1800MM	70W	W/WHI	9.00	6.00	3.75
T1815W	450MM	15W	WHITE	5.70	3.80	2.38



**T8 26mm^Ø
TRIPHOSPHOR**

CODE	COLOUR	LENGTH	WATTS	EACH	25+	100+
T218/827	827	600MM	18W	5.49	4.27	3.05
T218/835	835	600MM	18W	4.77	3.71	2.65
T218/840	840	600MM	18W	5.00	3.89	2.78
T436/827	827	1200MM	36W	5.31	4.13	2.95
T436/835	835	1200MM	36W	5.00	3.89	2.78
T436/840	840	1200MM	36W	4.95	3.85	2.75
T558/827	827	1500MM	58W	6.35	4.94	3.53
T558/835	835	1500MM	58W	5.99	4.66	3.33
T558/840	840	1500MM	58W	5.99	4.66	3.33
T670/835	835	1800MM	70W	10.04	7.81	5.58
T670/840	840	1800MM	70W	10.04	7.81	5.58

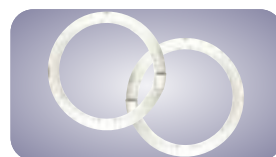


**CIRCULAR
FLUORESCENT TUBES**

CODE	DIAMETER	WATTS	EACH	5+
CIR22	209.5	22W	10.85	8.68
CIR32	311.2	32W	11.85	9.48
CIR40	412.6	40W	13.45	10.76
CIR60	412.6	60W	12.24	10.88




**T5 HIGH EFFICIENCY
16mm^Ø
COLOUR 840
LAMP LIFE 20000HRS**

CODE	CODE2	LENGTH	WATTS	EACH	25+	100+
T5/14W 840	2761	549	14	4.56	3.80	2.74
T5/21W 840	2764	849	21	4.56	3.80	2.74
T5/28W 840	2767	1149	28	4.56	3.80	2.74
T5/35W 840	2770	1449	35	4.56	3.80	2.74

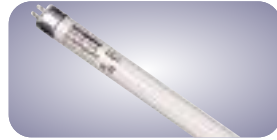

**T5 HIGH EFFICIENCY
HIGH OUTPUT 16MM^Ø
COLOUR 840
LAMP LIFE 20000HRS**

CODE	CODE2	LENGTH	WATTS	EACH	25+	100+
T5/24W 840	2773	549	24	4.56	3.80	2.74
T5/39W 840	2776	849	39	4.56	3.80	2.74
T5/49W 840	2777	1149	49	4.56	3.80	2.74
T5/54W 840	2782	1449	54	4.56	3.80	2.74



**T5 MINIATURE TUBES
(HALOPHOSPHATE)**

CODE	LENGTH	WATTS	EACH	25+	100+
T64	150MM	4W	3.48	2.90	2.03
T96	225MM	6W	3.48	2.90	2.03
T128	300MM	8W	3.36	2.80	1.96
T2113	525MM	13W	4.50	3.75	2.63



FLUORESCENT STARTER SWITCHES

Code	Description	Each	10+
FS2	4-20W 110-250V SERIES (PFS200)	0.35	0.26
FSU	4-65 & 80W UNIVERSAL (PFS500)	0.26	0.19
FS125	70-125W 240-250V (PFS800)	0.79	0.57
EFS600	ELECTRONIC 28-125W (NOT 100w)	3.05	2.22



**LED LAMPS CLOSED
FRONT LV**


Must be used with an LED controller.

CODE	DESCRIPTION	EACH	5+
LED/MR8W	MR8 25mm LED Lamp - White	5.61	5.02
LED/MR8BLU	MR8 25mm LED Lamp - Blue	4.66	4.17
LED/MR8GRN	MR8 25mm LED Lamp - Green	4.66	4.17
LED/MR11W	MR11 35mm LED Lamp - White	7.03	6.29
LED/MR11BLU	MR11 35mm LED Lamp - Blue	6.08	5.44
LED/MR11GRN	MR11 35mm LED Lamp - Green	6.08	5.44
LED/MR16W	MR16 50mm LED Lamp - White	11.31	10.12
LED/MR16BLU	MR16 50mm LED Lamp - Blue	10.36	9.27
LED/MR16GRN	MR16 50mm LED Lamp - Green	10.36	9.27




**LED GU10 ROUND LAMP
240V MAINS VOLTAGE
1.8w**

CODE	DESCRIPTION	EACH	5+
LED/8	GU10 50mm LED Lamp - White	5.16	4.43
LED/10	GU10 50mm LED Lamp - Blue	4.66	3.92
LED/15	GU10 50mm LED Lamp - Green	4.66	3.92



**12V DICHROIC LAMPS
CLOSED FRONT
GX5.3 50mm \varnothing**

CODE	TYPE	BEAM	WATTS	EACH	10+	50+
M268	ESX/CG	10°	20W	1.92	1.44	1.20
M269	BAB/CG	38°	20W	1.92	1.44	1.20
M271	FMT/CG	10°	35W	1.92	1.44	1.20
M281	FMW/CG	36°	35W	1.92	1.44	1.20
M249	EXN/CG	10°	50W	1.92	1.44	1.20
M250	EXZ/CG	24°	50W	1.92	1.44	1.20
M258	EXN/CG	38°	50W	1.92	1.44	1.20
M280	FNV/CG	60°	50W	1.92	1.44	1.20



**12V DICHROIC LAMPS
CLOSED FRONT
GU4 2PIN 35mm \varnothing**

CODE	TYPE	BEAM	WATTS	EACH	10+	50+
M252	FTB/CG	10°	20W	18.48	16.17	13.86
M266	FTF/CG	21°	35W	1.65	1.65	1.78



**GU10 240V DICHROIC
CLOSED FRONT**

CODE	LAMP LIFE HRS	Wattage	EACH	10+	50+
GU10/35W	2500	35	3.28	2.71	2.05
GU10/50W	2500	50	3.28	2.71	2.05




**LOW VOLT
CAPSULE LAMPS**

CODE	Voltage	CAP	LENGTH	WATTS	EACH	10+	50+
M11	12	G4	33MM	10W	1.64	1.23	1.03
M47	12	G4	33MM	20W	1.64	1.23	1.03
M75	12	GX6.35	44MM	35W	1.64	1.23	1.03
M32	12	GX6.35	44MM	50W	1.64	1.23	1.03
M28	12	GX6.35	44MM	100W	6.32	4.74	3.95



**G9 240V FROSTED
CAPSULE LAMPS**

CODE	Voltage	CAP	LENGTH	WATTS	EACH	10+	50+
G9/25	240	G9	Frosted	25W	3.72	2.79	2.33
G9/40	240	G9	Frosted	40W	3.72	2.79	2.33
G9/60	240	G9	Frosted	60W	3.72	2.79	2.33



**TUNGSTEN HALOGEN
FLOOD LAMPS 240V**

CODE	WATTS	TYPE	LENGTH	CAP	EACH	10+	50+
TH100	100W	K14	78MM	R7s	1.92	1.44	1.20
TH120	120W	K12	78MM	R7s	1.92	1.44	1.20
TH240	240W	K9	117MM	R7s	1.92	1.44	1.20
TH450	450W	K1	117MM	R7s	1.92	1.44	1.20
TH750	750W	K3	189MM	R7s	3.44	2.58	2.15
TH1000	1000W	K4	189MM	R7s	4.56	3.42	2.82
TH1500	1500W	K5	254MM	R7s	5.16	3.87	3.23

110V

CODE	WATTS	TYPE	LENGTH	CAP	EACH	10+	50+
TH240/LV	240W	K9	117MM	R7S	3.16	2.37	1.98
TH450/LV	450W	K1	117MM	R7S	3.16	2.37	1.98



**HIGH PRESSURE SODIUM
(SON) LAMPS ELLIPTICAL**

EXTERNAL IGNITOR

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
LU50/90/D/27	E27	156MM	50W	14.00	12.80	10.00
LU70/90/D/27	E27	156MM	70W	14.00	12.80	10.00
LU150/100/D/40	E40	186MM	150W	18.62	17.02	13.30
LU250/D/40	E40	227MM	250W	20.58	18.82	14.70
LU400/D/40	E40	282MM	400W	22.89	20.93	16.35



**HIGH PRESSURE SODIUM
(SON) LAMPS ELLIPTICAL**

INTERNAL IGNITOR

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
LU50/90/D/I/27	E27	156MM	50W	14.00	12.80	10.00
LU70/90/D/I/27	E27	156MM	70W	14.00	12.80	10.00



**HIGH PRESSURE SODIUM
(SON-T) LAMPS TUBULAR**

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
LU50/90/T/27	E27	156MM	50W	14.32	13.09	10.23
LU70/90/T/12/27	E27	156MM	70W	14.32	13.09	10.23
LU150/100/40	E40	211MM	150W	18.62	17.02	13.30
LU250/T/40	E40	260MM	250W	20.58	18.82	14.70
LU400/T/40	E40	283MM	400W	24.12	22.05	17.23




**LOW PRESSURE SODIUM
(SOX) LAMPS**

CODE	LENGTH	WATTS	EACH	10+	50+
SOX18	216MM	18W	68.25	62.40	48.75
SOX35	311MM	35W	63.63	58.18	45.45




**MERCURY BLENDED
(MBF/U) LAMPS**

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
MBF/U50W	E27	130MM	50W	8.47	7.74	6.05
MBF/U80W	E27	156MM	80W	8.47	7.47	6.05
MBF/U125W	E27	170MM	125W	8.79	8.03	6.28
MBF/U250W	E40	227MM	250W	10.76	16.67	13.03
MBF/U400W	E40	292MM	400W	16.56		



**METAL HALIDE LAMPS
2PIN G12 CAP**

CODE	REF	LENGTH	WATTS	EACH	10+
MHOT70W	(HOI-T)	90MM	70W	25.56	22.72
MHOT150W	(HOI-T)	76MM	150W	25.56	22.72



**METAL HALIDE LAMPS
DOUBLE ENDED RX7s**

CODE	REF	LENGTH	WATTS	EACH	10+
MHOTS70W	(HQI-TS)	114MM	70W	13.68	11.20
MHOTS150W	(HQI-TS)	132MM	150W	13.68	11.20

6 Reflector Lamps



R39 REFLECTOR LAMPS

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
R39	SES E14	39MM	30	2.48	2.05	1.55



R50 REFLECTOR LAMPS

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
R50-25WSES	SES E14	50MM	25	1.28	1.06	0.80
R50-40SES	SES E14	50MM	40	1.28	1.06	0.80



R63 REFLECTOR LAMPS

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
R63-40BC	BC B22	63.5MM	40	1.32	1.09	0.83
R63-40ES	ES E27	63.5MM	40	1.28	1.06	0.80
R63-60BC	BC B22	63.5MM	60	1.32	1.09	0.83
R63-60ES	ES E27	63.5MM	60	1.28	1.06	0.80



R80 REFLECTOR LAMPS

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
R80-100BC	BC B22	80MM	100	1.32	1.09	0.83
R80-100ES	ES E27	80MM	100	1.28	1.06	0.80
R80-40ES	BC B22	80MM	40	1.32	1.09	0.83
R80-60BC	ES E27	80MM	60	1.32	1.09	0.83
R80-60ES	ES E27	80MM	60	1.28	1.06	0.80



PAR38 (TUNGSTEN) (2000HRS) 240V 124mm^Ø ES E27

CODE	WATTS	BEAM	EACH	10+	50+
PAR80S	80W	SPOT	4.25	3.23	2.89
PAR80F	80W	FLOOD	4.25	3.23	2.89
PAR120S	120W	SPOT	4.25	3.23	2.89
PAR120F	120W	FLOOD	4.25	3.23	2.89



PAR38 COLOURED FLOOD LAMPS (2000HRS) 240V 124mm^Ø ES E27 80W

CODE	COLOUR	BEAM	EACH	10+	50+
PAR80B	BLUE	FLOOD	8.10	5.94	
PAR80G	GREEN	FLOOD	8.10	5.94	
PAR80R	RED	FLOOD	8.10	5.94	
PAR80Y	YELLOW	FLOOD	8.10	5.94	



R80 COLOURED SPO ES E27 LAMPS

CODE	COLOUR	DIAMETER	WATTS	EACH	10+	50+
R80-60BES	BLUE	80MM	60	2.72	2.24	1.70
R80-60GES	GREEN	80MM	60	2.72	2.24	1.70
R80-60RES	RED	80MM	60	2.72	2.24	1.70
R80-60YES	YELLOW	80MM	60	2.72	2.24	1.70



PAR16 HI-SPOT 50 240V 40W SES E14 25° BEAM

CODE	LAMP LIFE HRS	EACH	10+	50+
PAR1621084	2000	POA	POA	POA



PAR20 HI-SPOT 63 240V 50W ES E27

CODE	LAMP LIFE HRS	BEAM	EACH	10+
HI21127	2500	10°	4.70	3.76
HI21128	2500	25°	4.70	3.76



PAR25 HI-SPOT 80 240V ES E27

CODE	WATTS	LAMP LIFE HRS	BEAM	EACH	10+
HI21161	50W	2500	10°	4.49	4.08
HI21162	50W	2500	25°	4.49	4.08
HI21163	75W	2500	10°	4.49	4.08
HI21164	75W	2500	25°	4.49	4.08



PAR30 HI-SPOT 95 240V ES E27

CODE	WATTAGE	LAMP LIFE HRS	BEAM	EACH	10+
HI21232	100	3000	10° SPOT	5.10	4.08
HI21233	100	3000	30° FLOOD	5.10	4.08



PAR38 HI-SPOT 120 240V ES E27

CODE	WATTAGE	LAMP LIFE HRS	BEAM	EACH	10+
HI21146	100	3000	10° SPOT	5.65	4.52
HI21147	100	3000	30° FLOOD	5.65	4.52



PAR56 REFLECTOR LAMPS 300W 240V GX16D CAP 127mm^Ø

CODE	LENGTH	BEAM	EACH	6+
300PAR56/NFL	127MM	NARROW SPOT	POA	POA
300PAR56/MFL	127MM	MEDIUM FLOOD	POA	POA
300PAR56/WFL	127MM	WIDE FLOOD	POA	POA



PAR56 SPOT LAMPS 300W 12V SCREW TERM (SWIMMING POOL LAMP)

CODE	LENGTH	EACH	6+
300PAR56/LOW	114MM	POA	POA

PLEASE NOTE

AS OF SEP 1ST 2009 ALL OPAL / PEARL AND 100W GLS CLEAR INCANDESCENT LAMS WILL NO LONGER BE MANUFACTURED. AND WILL BE AVAILABLE ONLY WHILE STOCKS LAST.




GLS 240V CLEAR BC B22 & ES E27

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
GLS40BCC	BC B22	60MM	40	0.60	0.50	0.40
GLS60BCC	BC B22	60MM	60	0.60	0.50	0.40
GLS100BCC	BC B22	60MM	100	0.60	0.50	0.40
GLS40ESC	ES E27	60MM	40	0.60	0.50	0.40
GLS60ESC	ES E27	60MM	60	0.60	0.50	0.40
GLS100ESC	ES E27	60MM	100	0.60	0.50	0.40



COLOURED GLS LAMPS 240V BC B22

CODE	COLOUR	DIAMETER	WATTS	EACH	10+	50+
GLS25ABC	AMBER	60MM	25	1.92	1.60	1.28
GLS25BBC	BLUE	60MM	25	1.92	1.60	1.28
GLS25GBC	GREEN	60MM	25	1.92	1.60	1.28
GLS25PBC	PINK	60MM	25	1.92	1.60	1.28
GLS25RBC	RED	60MM	25	1.92	1.60	1.28
GLS25YBC	YELLOW	60MM	25	1.92	1.60	1.28



FIREGLOW LAMPS 240v BC B22

CODE	DIAMETER	WATTS	EACH	10+	50+
FIRE	60MM	60	1.23	1.03	0.82



45mm ROUND GOLFBALL LAMPS CLEAR 240V

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
RND25BCC	BC B22	45MM	25	0.66	0.57	0.48
RND40BCC	BC B22	45MM	40	0.66	0.57	0.48
RND25SBCC	SBC B15	45MM	25	0.66	0.57	0.48
RND40SBCC	SBC B15	45MM	40	0.66	0.57	0.48
RND25SESC	SES E14	45MM	25	0.66	0.57	0.48
RND40SESC	SES E14	45MM	40	0.66	0.57	0.48




45mm ROUND GOLFBALL LAMPS COLOURED 25W 240V

CODE	CAP	DIAMETER	COLOUR	EACH	10+	50+
RNDB(920)	BC B22	45MM	BLUE	1.29	1.08	0.86
RNDG(920)	BC B22	45MM	GREEN	1.29	1.08	0.86
RNDO(920)	BC B22	45MM	ORANGE	1.29	1.08	0.86
RNDR(920)	BC B22	45MM	RED	1.29	1.08	0.86
RNDW(920)	BC B22	45MM	WHITE	1.29	1.08	0.86
RNDY(920)	BC B22	45MM	YELLOW	1.29	1.08	0.86



COLOURED PYGMY LAMPS 240V BC

CODE	COLOUR	LENGTH	WATTS	EACH	10+	50+
PYG15BCGRN	GREEN	28MM	15W	1.26	1.08	0.90
PYG15BCAMBER	AMBER	28MM	15W	1.26	1.08	0.90
PYG15BCBLUE	BLUE	28MM	15W	1.26	1.08	0.90
PYG15BCRED	RED	28MM	15W	1.26	1.08	0.90
PYG15BCYEL	YELLOW	28MM	15W	1.26	1.08	0.90



STRIP LAMPS CLEAR

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
STR221-30C	2XS15S	221	30	2.08	1.89	1.58
STR221-60C	2XS15S	221	60	2.08	1.89	1.58
STR284-30C	2XS15S	284	30	2.08	1.89	1.58
STR284-60C	2XS15S	284	60	2.08	1.89	1.58



STRIP LAMPS OPAL

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
STR221-30O	2XS15S	221	30	2.08	1.89	1.58
STR221-60O	2XS15S	221	60	2.08	1.89	1.58
STR284-30O	2XS15S	284	30	2.08	1.89	1.58
STR284-60O	2XS15S	284	60	2.08	1.89	1.58



SPECIAL LANTERN 240V BC B22 & ES E27

Designed for outdoor lanterns with a long life and a warm golden glow.

CODE	CAP	DIAMETER	WATTS	EACH	10+	50+
LAN55	BC B22	35MM	55	4.29	3.72	3.15
LAN55	ES E27	35MM	55	4.29	3.72	3.15



PYGMY LAMPS 240V CLEAR

CODE	CAP	LENGTH	WATTS	EACH	10+	50+
PYG15BC	BC B22	28MM	15W	1.00	0.60	0.50
PYG15SBC	SBC B15	28MM	15W	1.00	0.60	0.50
PYG15SES	SES E14	28MM	15W	1.00	0.60	0.50
PYG15ES/612515E	ES E27	28MM	15W	POA	POA	POA
PYG25SBC	SBC B15	28MM	25W	POA	POA	POA



APPLIANCE LAMPS 240V SES CLEAR

CODE	DESCRIPTION	WATTS	EACH	10+	50+
OVEN15SES	OVEN 300°	15W	1.88	1.41	1.18
OVEN25SES	OVEN 300°	25W	1.88	1.41	1.18
OVEN40SES	OVEN 300°	40W	1.88	1.41	1.18



APPLIANCE LAMPS 240V SES CLEAR

CODE	DESCRIPTION	WATTS	EACH	10+	50+
40SESTUB	COOKER HOOD OR FRIDGE	40W	1.92	1.44	1.20


Please ask for a copy of our other catalogues, there is one to suit your requirements
Please visit our Bathroom Showroom at our Dartford Branch




Electrical Catalogue



Plumbing Catalogue

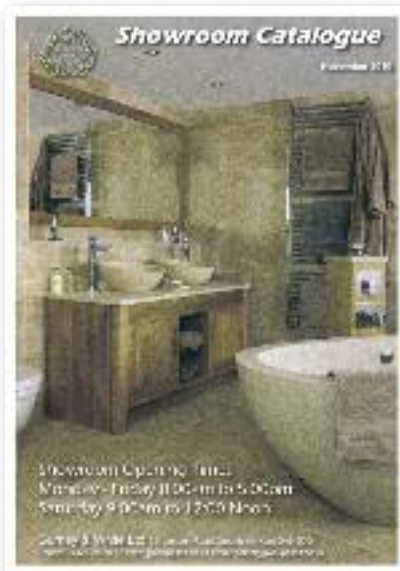

Bathroom Catalogue

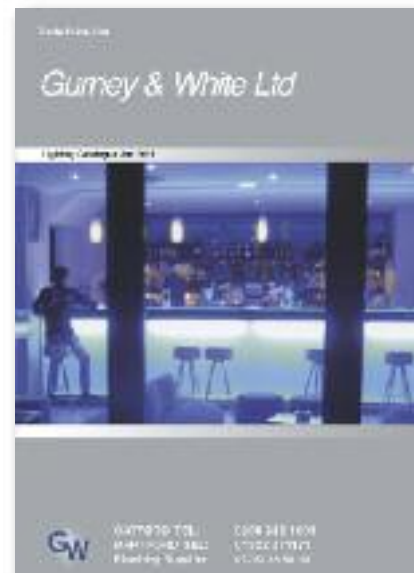

Lighting Catalogue



Household Appliances

Dartford Branch

211 - 213 London Road
Greenhithe DA9 9DQ
Ph: 01322 27 11 71 Fx: 01322 27 22 66

Catford Branch

2 Barmeston Road
Catford SE6 3BH
Ph: 0208 333 1001 Fx: 0208 695 6773

sales@gwsupplies.co.uk